
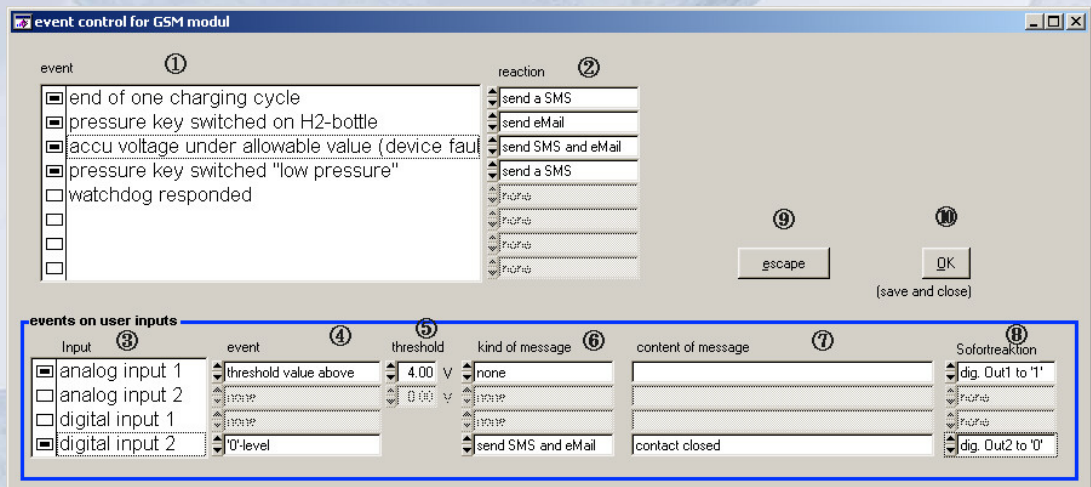


GSM - function for power supply LG22T2 / LG45T2

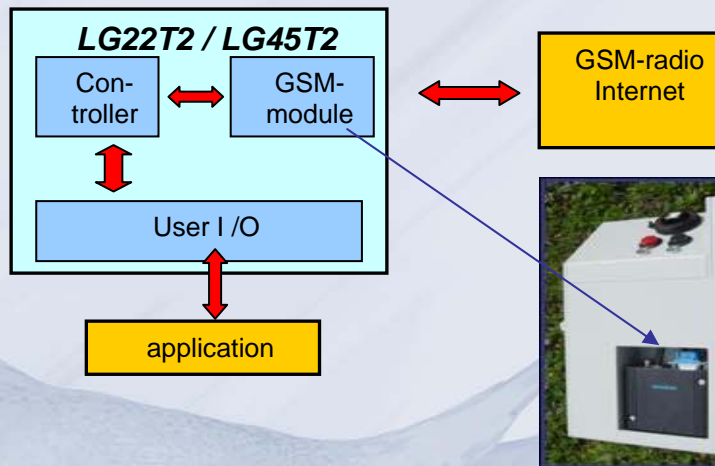

Operating features:

Equipment for communication with device (power supply) and user input/output interface by SMS or e-mail

- Sending messages depending on device status or operating events (parameterizable)
 - o Minimal pressure of hydrogen storage reached (change bottle)
 - o Voltage at accumulator below minimal value
 - o End of charging cycle → transmit cycle data / device data
- Input/output of user interface → actions in dependence of modification of a digital input or an analogue input in relation to a reference value
 - o Transmit a message with an user defined text
 - o Influence an output (set, reset, toggle)
 - o Set, reset or toggle an output by a SMS- or e-mail-command
- Data recording
 - o Recording of selected device parameters
 - o Recording of selected inputs of user input/output interface
- Transmission of device data after request by command SMS or e-mail
- Protection against unauthorized access by means of a PIN (4 numbers)

Hardware:

GSM module TC35i T HD v01.05

Order number:

ZEMIS® LGT2OP06